


FEATURES

- ◆ 95% efficiency for very low heat dissipation
- ◆ 25 kHz PWM switching for no audible noise
- ◆ Completely protected against overvoltage, undervoltage, short-circuits and overtemperature
- ◆ 3 kHz bandwidth
- ◆ Ready to plug into Servo Power Box
- ◆ External enable signal to turn amplifier On/Off
- ◆ DIN card format (100 mm x 160 mm)
- ◆ Comes with a 32-pin DIN card connector
- ◆ Single voltage supply required

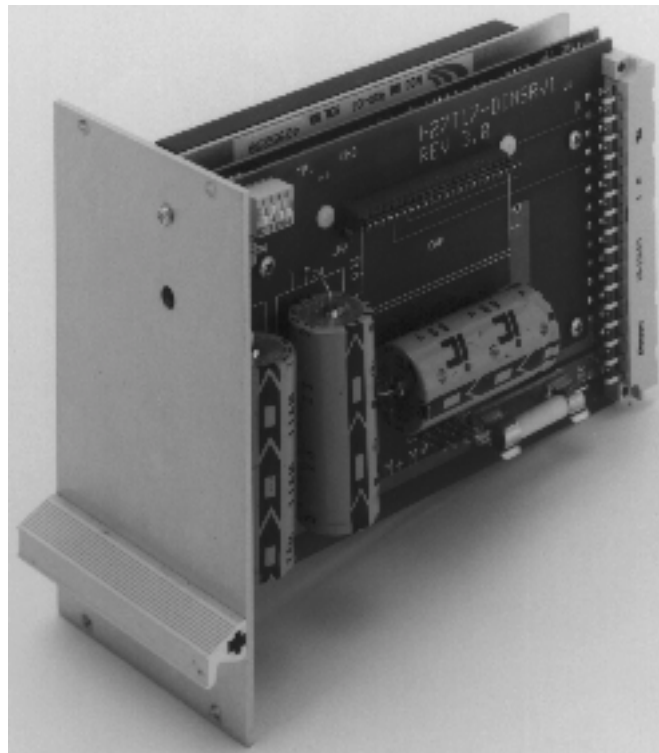

SPECIFICATIONS	Catalog Number	
	H20C17-4122P-01	H20C17-4122P-02
Peak Current	± 12A	± 20A
Continuous Current	± 6A	± 10A
Voltage Supply	+22 to +90V DC	+22 to +125V DC
Input Signal	± 10V DC	
PWM Frequency	25 kHz	
Operating Temperature Range	0°C - 50°C	
Motor Inductance	200µH to 40mH	
Weight	.75 lbs	